


Aluminum enclosure

LV Aluminum boxes are suitable for installation, circuit breaking, connection and control of electric and electronic equipments, and find their main application in industrial, automotive, railways, navy, tunnels, parkings, industrial buildings fields ensuring a high mechanical and vibration resistance with IP66 protection degree. Standard Supply: Aluminum box PUR seal stainless steel screws, M4 screws

Material: AISI 12 DIN1725 Standard Protection Degree: IP66 EN60529 Standard Resistance to Impact: >7 Joule EN50014 Standard
 Temperature Range: -50°C to 130°C Paint Finish: Epoxy polyester powder coating Color: RAL7038

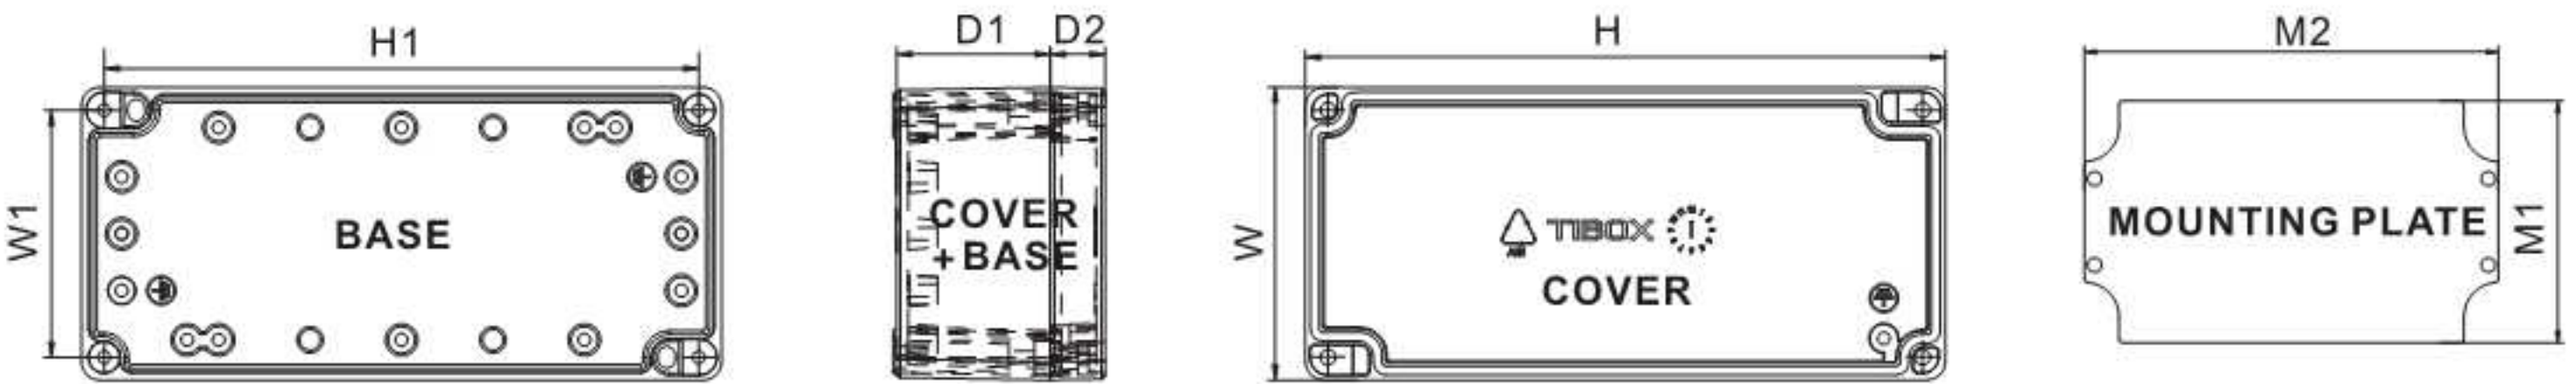

	Size (mm) W H D	Product model	W ₁	H ₁	D ₁	D ₂	Plate Metal Model	M ₁	M ₂	Thickness:Cover	Thickness:Base
	64x58x36	LV0605	45	51	21	15	V0605	48.5	54.5	4.8	3.4
	64x98x36	LV0906	51.5	85.5	21	15	V0906	51	85	4.6	3.0
	64x150x36	LV1506	51.5	137.5	21	15	V1506	51	137	4.5	4.5
	65x115x55	LV1106	51	101	40	15	V1106	51	101	4.7	3.2
NEW	80x140x60	LV1408	67	127	47	15	V1408	68	128	3.0	2.7
	80x175x57	LV1708	67.5	162.5	42	15	V1708	66	161	5.4	3.5
	80x250x57	LV2508	67.5	237.5	42	15	V2508	66	236	3.0	3.0
NEW	82x 77x57	LV0807	65	70.5	42	15	V0807	66.5	71.5	5.3	3.5
	82x102x57	LV1008	69	89	42	15	V1008	71	91	4.7	3.0
	82x127x57	LV1208	70	115	42	15	V1208	72	117	4.6	3.0
	100x100x80	LV1010	85	85	60	20	V1010	88.5	88.5	4.6	3.2
	100x160x80	LV1610-1	85	145	60	20	V1610-1	84.5	144.5	4.6	3.1
	100x200x80	LV2010	85	185	60	20	V2010	87	187	4.7	3.0
	125x125x80	LV1212	106	105	60	20	V1212	110.5	110.5	5.5	3.6
	120x360x80	LV3612	91	339	60	20	V3612	105	345	5.6	4.1
	125x220x80	LV2212	109	206	60	20	V2212	112	209	5.2	4.2
	140x220x90	LV2214-2	118	198	70	20	V2214-2	122	102	5.4	4.2
	160x160x90	LV1616-1	141	141	70	20	V1616-1	148.5	148.5	5.5	3.6
	160x260x90	LV2616	144	243	70	20	V2616	147.5	248.5	5.8	4.0
	160x360x90	LV3616	139	339	70	20	V3616	142.5	342.5	5.4	4.5
NEW	160x560x90	LV5616	140	540	70	20	V5616	140	540	3.7	3.5
NEW	180x180x101	LV1818	160	160	70	30	V1818	160	165	4.0	4.0
NEW	180x280x100	LV2818	160	260	30	70	V2818	167	267	4.0	4.4
	230x200x110	LV2320	180	212	90	20	V2320	183	213	4.4	4.5
	230x280x110	LV2823	211	260	90	20	V2823	213	263.5	7.4	5.3
	230x330x120	LV3323-1	211	310	95	25	V3323-1	212.5	312.5	7.0	5.0
NEW	230x400x110	LV4023	210	381	20	90	V4023	214	384	4.5	3.5
NEW	313x403x111	LV4031	292	382	90	20	V4031	292	383	4.5	4.5
	600x310x110	LV6031	289	579	90	20	V6031	292	582	9.2	6.0



Aluminum enclosure



Model:LV0506 Size:64X58X36mm



Model:LV0906 Size:98X64X36mm



Model:LV1506 Size:150X64X36mm



Model:LV1106 Size:115X65X55mm



Model:LV1408 Size:80X140X60mm



Model:LV1708 Size:175X80X57mm



Model:LV2508 Size:250X80X57mm



Model:LV0807 Size:82X77X57mm



Model:LV1008 Size:82X102X57mm



Model:LV1208 Size:127X82X57mm



Model:LV1010 Size:100X100X80mm



Model:LV1610-1 Size:160X100X80mm



Model:LV2010 Size:200X100X80mm



Model:LV1212 Size:125X125X80mm



Model:LV3612 Size:360X120X80mm

Aluminum enclosure



Model:LV2212 Size:220X125X80mm



Model:LV2214-2 Size:220X140X90mm



Model:LV1616-1 Size:160X160X90mm



Model:LV2616 Size:260X160X90mm



Model:LV3616 Size:360X160X90mm



Model:LV5616 Size:160X560X90mm



Model:LV1818 Size:180X180X101mm



Model:LV2818 Size:280X180X100mm




Model:LV2320 Size:230X200X110mm



Model:LV2823 Size:280X230X110mm



Model:LV3323-1 Size:330X230X120mm

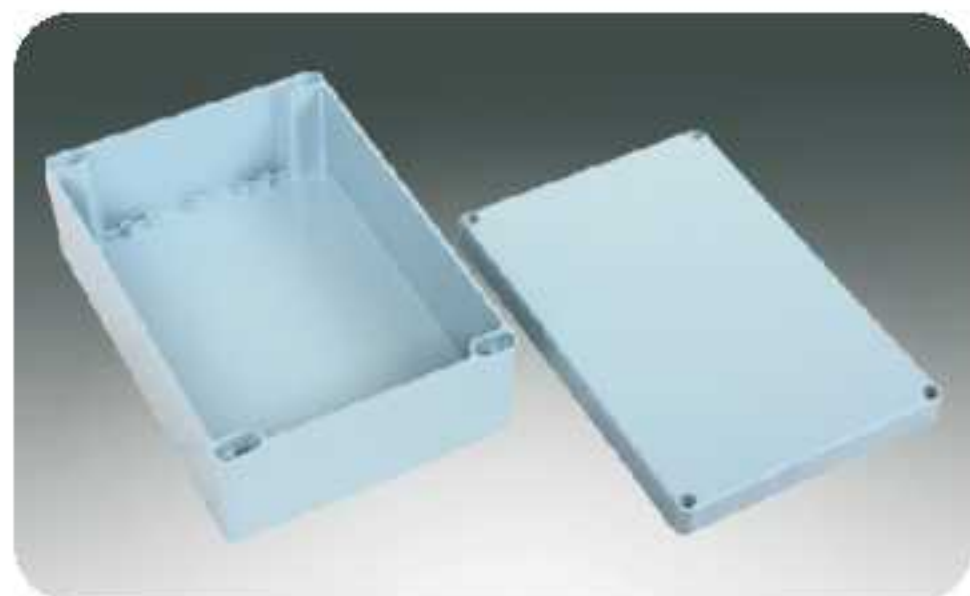

Model:LV4023 Size:230X400X110mm



Model:LV4031 Size:313X403X111mm



Model:LV6031 Size:600X310X110mm
Allowable error: ± 1mm

Accessories



Model:L1



L1 installation complete



Model:L2



L2 installation complete

